arXiv:astro-ph/0510138v2 20 Nov 2005

# Wind ionization structure of the short-period eclipsing LMC Wolf-Rayet binary BAT99-129: preliminary results *

C. Foellmi[1], A.F.J. Moffat[2] & S.V. Marchenko[3]
*1. European Southern Observatory, 3107 Alonso de Cordova, 19 Vitacura, Santiago, Chile. (*`cfoellmi@eso.org`*)*
*2.Département de physique, Université de Montréal, C.P. 6128, Succ. Centre-Ville, Montréal, QC, H3C 3J7, Canada*
*3. Department of Physics and Astronomy, Thompson Complex Central Wing, Western Kentucky University, Bowling Green, KY 42101-3576, USA.*

September 30, 2005

**Abstract.** BAT99-129 is a rare, short-period eclipsing Wolf-Rayet binary in the Large Magellanic Cloud. We present here medium-resolution NTT/EMMI spectra that allow us to disentangle the spectra of the two components and find the orbital parameters of the binary. We also present VLT/FORS1 spectra of this binary taken during the secondary eclipse, i.e. when the companion star passes in front of the Wolf-Rayet star. With these data we are able to extract, for the first time in absolute units for a WR+O binary, the sizes of the line emitting regions.

**Keywords:** binaries: close – binaries: Wolf-Rayet – binaries: eclipsing – binaries: individual: BAT99-129 – binaries: evolution – stars: massive stars

## 1. Presentation

The Wolf-Rayet (WR) star BAT99-129 (a.k.a Brey 97, see Breysacher et al., 1999, hereafter BAT129) has been discovered to be a short-period eclipsing binary by Foellmi et al. (2003b). It consists of a nitrogen-rich WN4 Wolf-Rayet component and a companion of unknown spectral-type. Along with BAT99-19 (Brey 16) in the LMC and HD 5980 in the SMC, BAT129 belongs to the very small group of extragalactic eclipsing Wolf-Rayet binaries.

Absorption lines are visible in the spectrum of BAT129, especially in the blue part of the optical range ($\lesssim$4000Å), while WR emission lines strongly dominate everywhere else. The origin of these absorption lines was unclear: they are either produced by an O-type companion, and/or they originate in a WR wind, as has been found in all the *single early-type* WN (WNE) stars in the SMC and, to a lesser extent, in the LMC (Foellmi et al., 2003a; Foellmi et al., 2003b; Foellmi, 2004).

Previous data did not allow us to obtain the orbital motion of the companion star. Moreover, being eclipsing, the system deserved

---

[*] Based on observations obtained at the La Silla and Paranal Observatories, European Southern Observatory (Chile).

© 2008 *Kluwer Academic Publishers. Printed in the Netherlands.*

much more study. Thus, we acquired medium-resolution spectra with the EMMI spectrograph, mounted on the New Technology Telescope (NTT, La Silla Observatory, Chile). These data allowed us to resolve the orbital motion of the companion star, and find a relatively large hydrogen content on the WR star. In addition, we obtained long-slit spectra with the instrument FORS1 at the Very Large Telescope (VLT, Paranal Observatory, Chile). These spectra allow us to study the wind ionization structure of BAT129.

## 2. The orbit of BAT129

The EMMI spectra have wavelength coverage of 3920-4380 Å and a resolving power of 3500 (resolution of 2.6 pixels). The typical 30-min exposure resulted in S/N ratio between 50 and 90. The spectra were shifted to the heliocentric rest frame, and normalized to unity using continuum regions common to all spectra (see Foellmi et al. (2005) for details).

We then performed an iterative method, first described in Demers et al. (2002), to reconstruct the individual mean spectra. Basically, this hypothesis-free method consists of shifting the spectra in the radial-velocity (RV) space to a common rest frame of, say, the first component and then combining them to build a high S/N spectrum of this component. This latter spectrum is shifted back to the original positions and subtracted from the original spectra. This provide a first guess of the spectrum of the second component. This procedure is started again for the second component with its respective RVs, and the new mean spectrum is again subtracted from the original spectra. This completes one full iteration. Between 3 and 5 iterations are necessary to obtain stable results.

Interestingly, a blue-shifted absorption profile is discovered in the emission lines of the WR spectrum. These absorption lines are certainly related to the WR star itself, similarly to what was found in other SMC and the LMC WR stars (see e.g. Foellmi et al. (2003a)). We were then able to compute a full orbital solution (summarized in Fig. 2), confirm the WN4ha spectral type of the WR star and assign an O5V spectral type to the companion (Foellmi et al., 2005). The minimum masses of the two stars are $\mathrm{M}_{WR}\ \sin^3 \mathrm{i} = 14 \pm 2\ M_\odot$ and $\mathrm{M}_O\ \sin^3 \mathrm{i} = 23 \pm 2\ M_\odot$, respectively, and the minimum separation $a \sin i = 27.9 \pm 0.5\ R_\odot$.

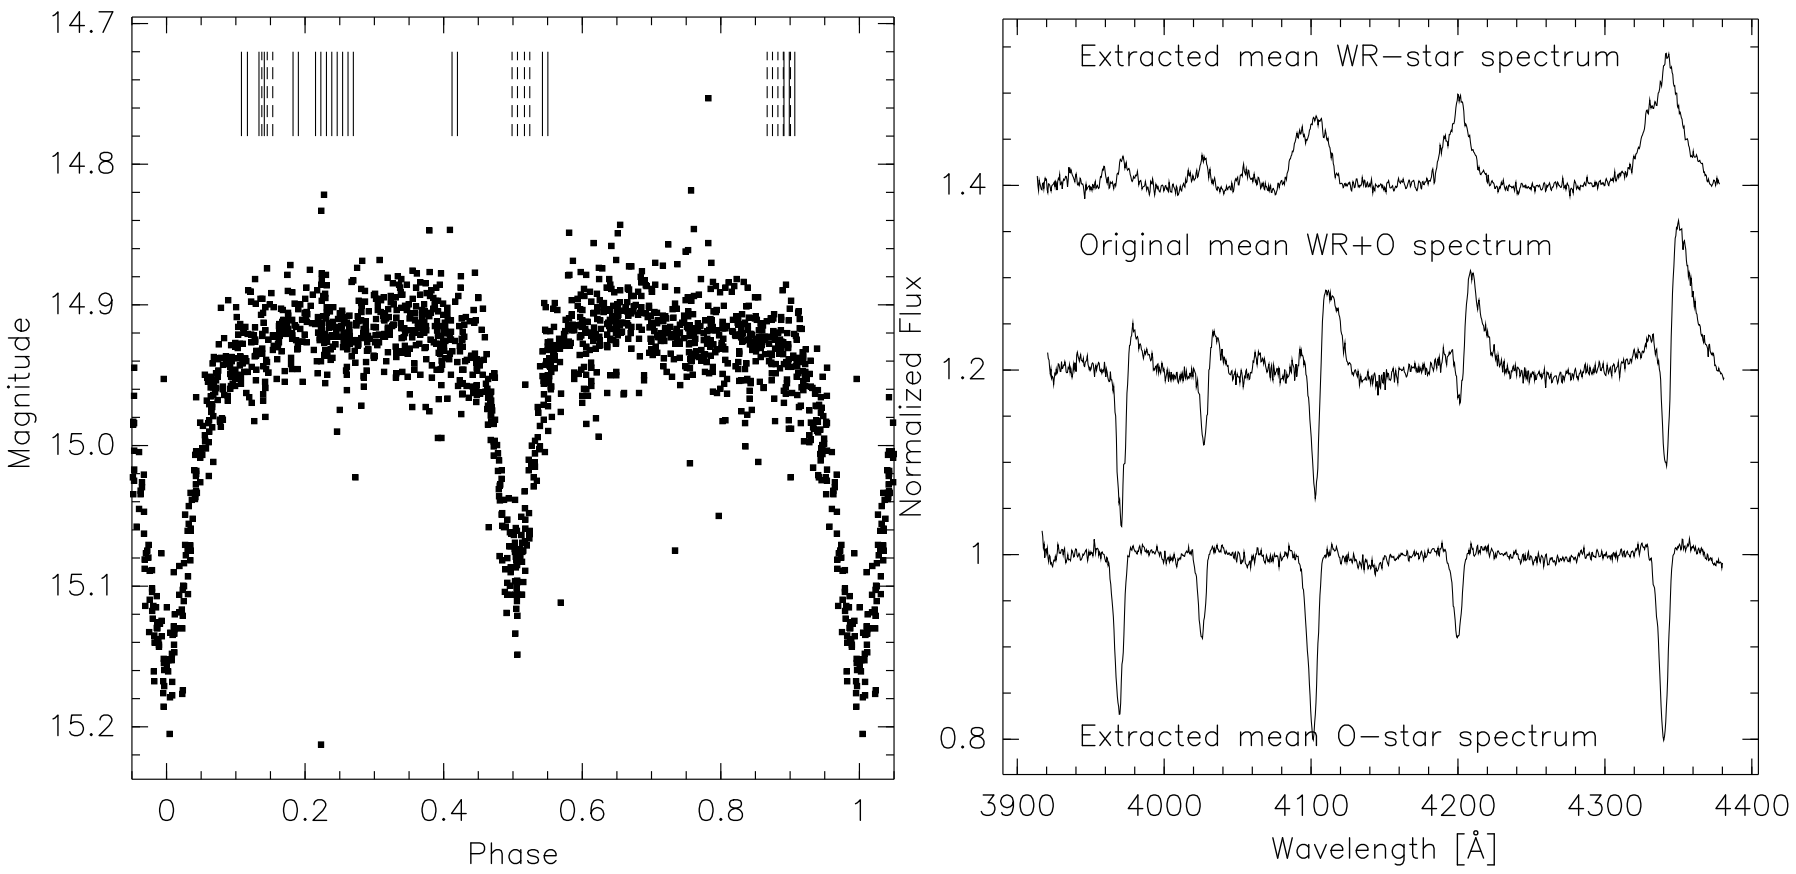

*Figure 1.* Left panel: MACHO light curve of BAT129, as described in Foellmi et al. (2003b). The phases at which EMMI spectra were obtained are indicated by vertical lines. Right panel: result of the separation procedure. The original mean spectrum and the extracted WR spectrum have been shifted by 0.2 and 0.4 continuum units for clarity.

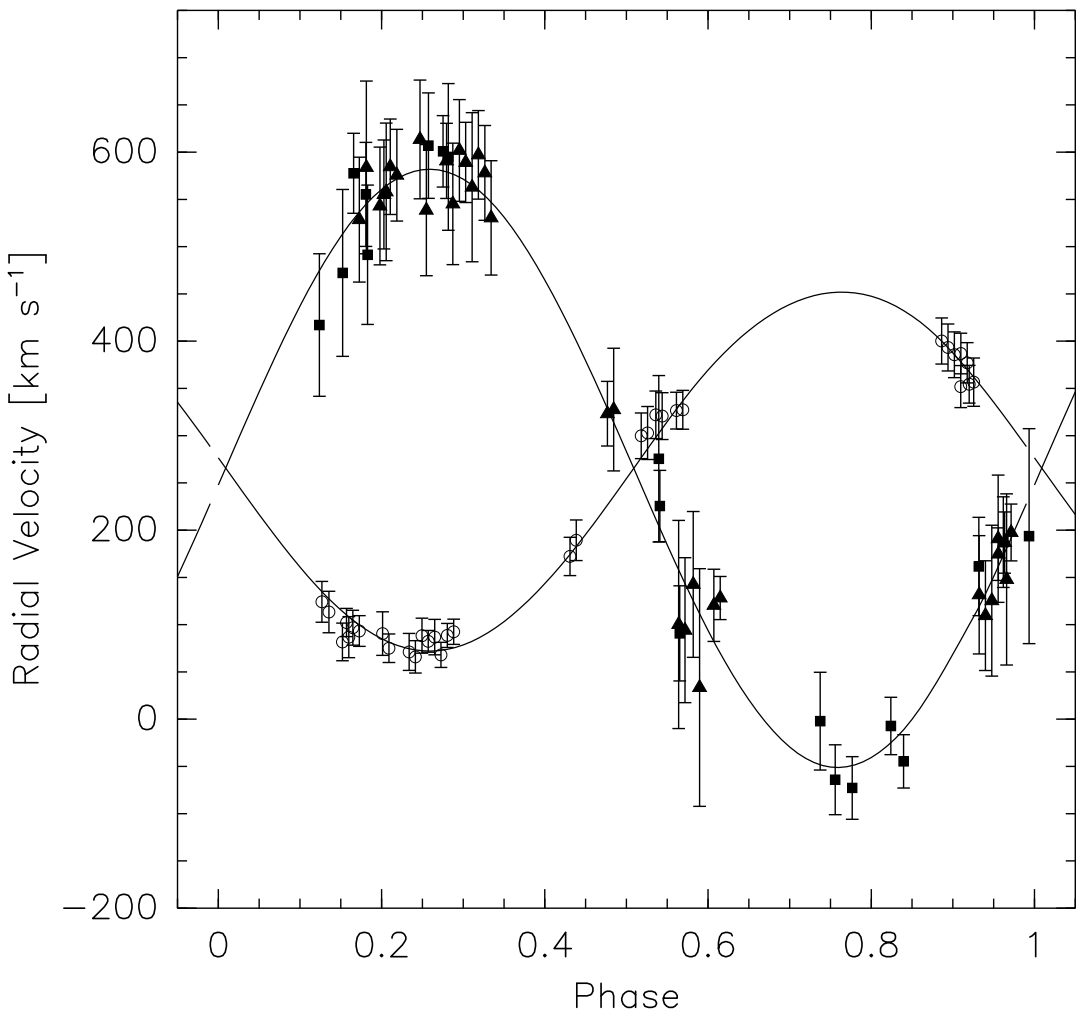

*Figure 2.* The final orbit of the system. The orbital parameters (with their usual denominations) are the following: Period = 2.7689 ± 0.0002 days (from MACHO photometry), e=0 (assumed), $K_{WR}$ = 316 ± 5 $\mathrm{km\,s^{-1}}$, $K_O$ = 193 ± 6 $\mathrm{km\,s^{-1}}$, $E_0$ = 2451946.4274 ± 0.0054 (HJD), $\gamma$ = 265 ± 5 $\mathrm{km\,s^{-1}}$.

## 3. The ionization structure of the wind

Armed with the full set of orbital parameters of the system (except the inclination angle), we are able to use our VLT/FORS1 spectra to sketch the ionization structure of the wind of the WR component in

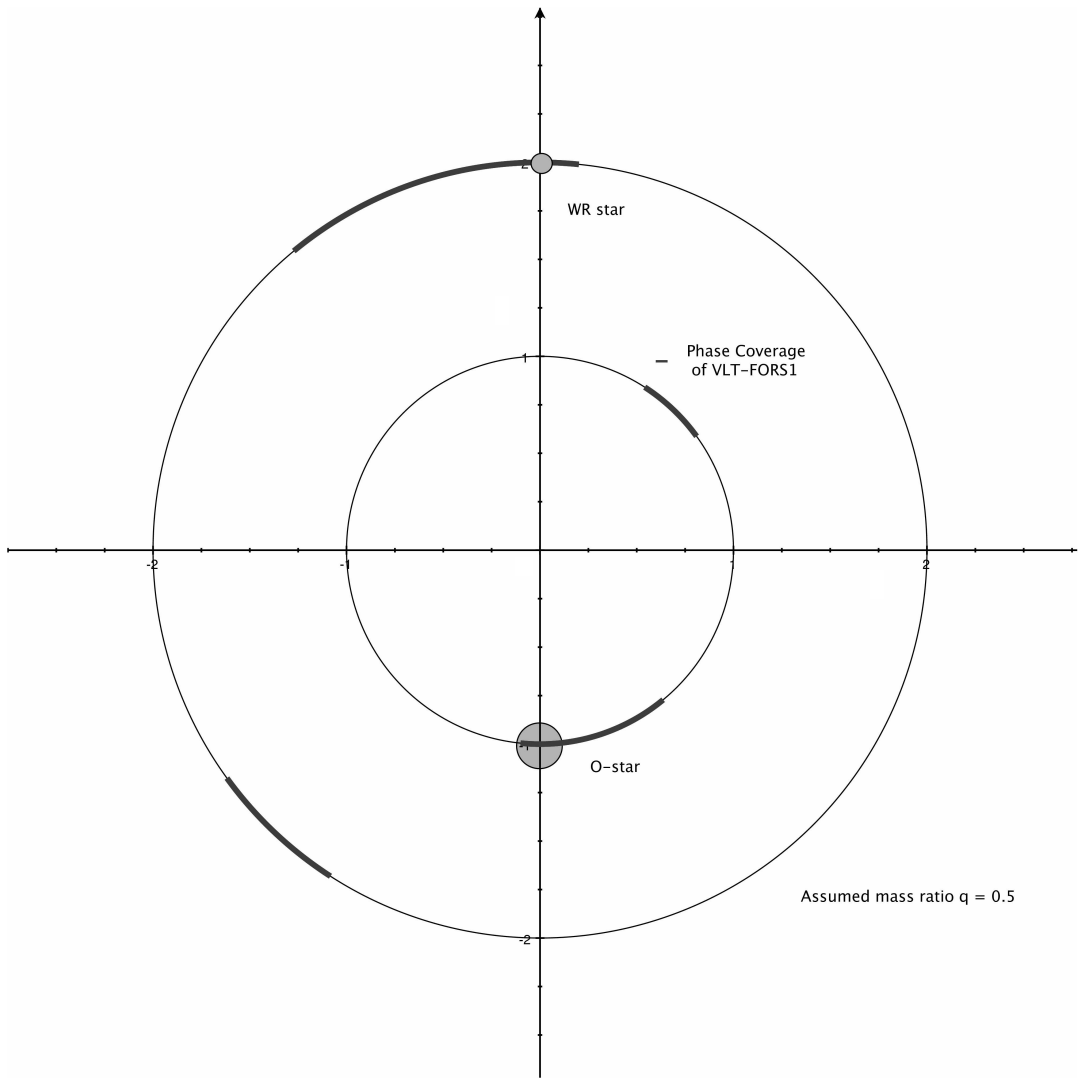

*Figure 3.* Sketch of the observations obtained with VLT/FORS1. A mass of the O star roughly twice that of the WR star has been assumed. The two large circles indicate the respective orbital trajectories of the stars. Bold parts on these circles indicates when, according to the ephemeris of our observations, FORS1 spectra were obtained. The longest bold parts correspond to the data of the first night, while the shortest ones correspond to the second half-night.

BAT129. Our FORS1 spectra were taken in December 2003, and have a wavelength range from 3700 to 8900Å, and a resolving power of about 500. One spectrum of S/N∼200 was obtained every 6 minutes during one night through the secondary eclipse (i.e. when the O star is in front of the WR star), and identically during the next half-night. A sketch of the geometry is presented in Fig. 3. It shows the orbital plane seen from above, and where the spectra were obtained during the orbit.

The idea is as follows. We assume that in the optical the O component can be treated as a geometrically-occulting disk (i.e. a windless star); plus, the WR wind has a clear wind stratification, i.e. the line-formation zones are located at different distances from the WR core, depending on the ion and its ionization potential. Therefore, following the O star passing in front of the WR star should reveal, minute-by-minute, which region is eclipsed and during how much time. This can be measured by the variations of the equivalent widths (EWs) of the different emission lines present in the spectra (after being corrected for the varying continuum level using the MACHO lightcurve). The preliminary results are shown in Fig. 4, where the normalized EWs have been plotted against the orbital phase.

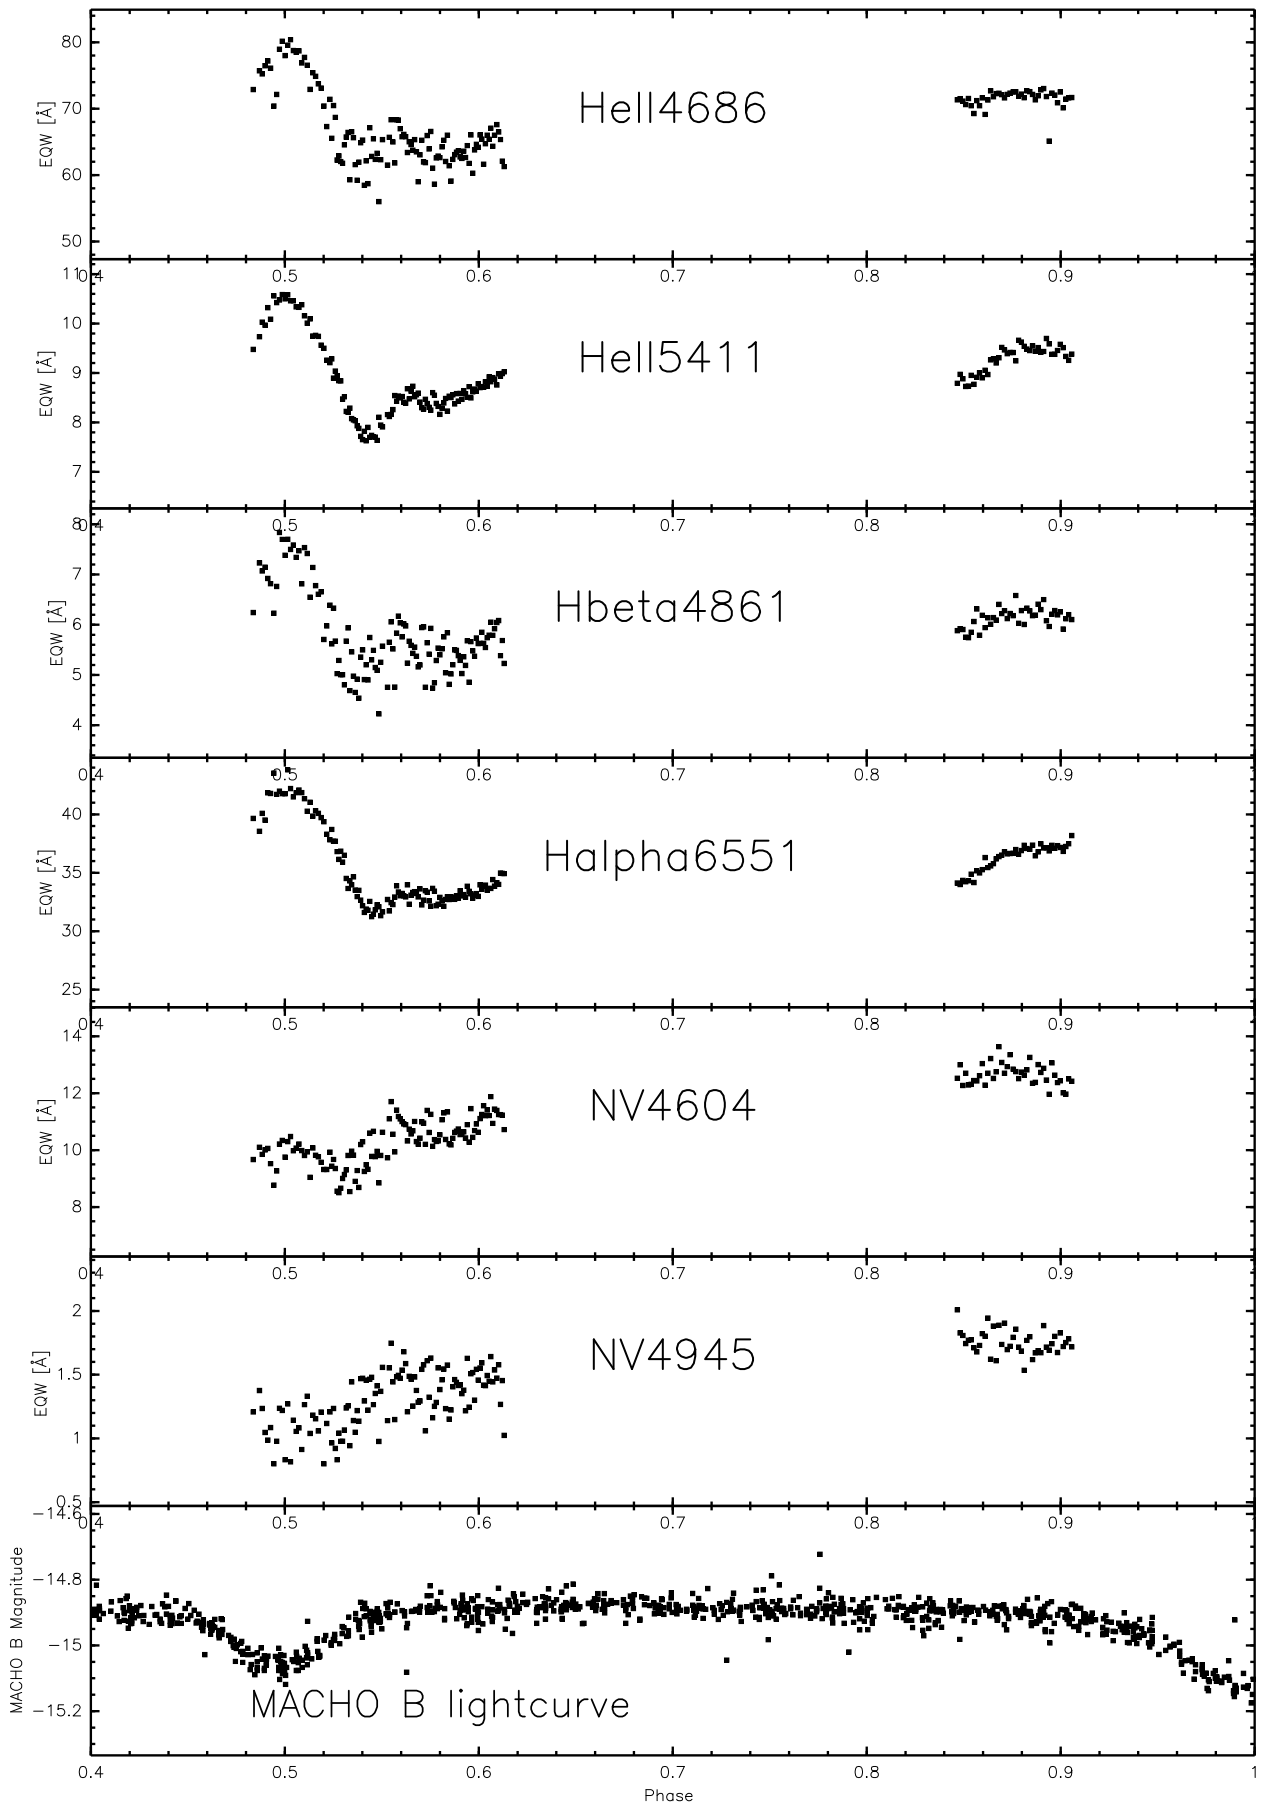

*Figure 4.* Variations of the *absolute values* of the equivalent widths of various lines in the FORS1 spectra of BAT129 versus the orbital phase. The bottom panel shows the MACHO lightcurve. It can be easily seen that lines of different ions and/or different ionization potentials are not eclipsed at the same time.

## 4. Discussion

The variations of the EWs reveal that lines of different ions and/or different ionization potentials are eclipsed at different times, *and with different patterns.* It is possible to roughly draw the following picture. The NV $\lambda$4945 line seems to follow the behavior of the photometric eclipse. This can be understood if this line is formed very close to the WR core, as does the continuum. Similarly, if we assume a perfectly symmetric pattern on each side of the photometric eclipse core (PEC), the NV $\lambda$4604 line has its EW eclipsed, then increased slightly at the PEC, and eclipsed again. This could be interpreted as the line is formed in a shell a bit further away from the WR core, and its projected appearance is essentially an annulus.

The interpretation of the other lines is more difficult. At first sight, a strong increase seems to occur precisely during the photometric eclipse. However, it can be seen that the reference level, as shown in the EW values of the second half night, are slightly changing, and their mean level is *lower* than that of the maximum at the PEC. It is possible to interpret these variations if the regions where these lines are emitted as having an inner radius that is slightly larger than that of the O star projected radius. Therefore, the eclipsing effect of the O star is at its *minimum* when the O star is aligned with the WR star. When the O star moves away from this alignment, the line emitting regions start to be eclipsed.

The situation is probably not as clear cut as this, since the orbital inclination of the system is not known. Although close to 90 degrees, it is likely that even at the PEC, the O star eclipses a (small) part of the regions where the above lines are formed. Interestingly, small wiggles in the EW variations (around phase 0.57, see Fig. 4) seem to show that line emitting regions are not simple shells. These measurements have a direct impact on WR atmosphere models, such as those of Hamann and Koesterke (2000).

## References

Breysacher, J., M. Azzopardi, and G. Testor: 1999, 'The fourth catalogue of Population I Wolf-Rayet stars in the Large Magellanic Cloud'. *A&A Supl.* **137**, 117–145.

Demers, H., A. F. J. Moffat, S. V. Marchenko, K. G. Gayley, and T. Morel: 2002, 'The Quadruple Wolf-Rayet System GP Cephei: Spectral Types, Masses, Mass-Loss Rate, and Colliding Winds'. *ApJ* **577**, 409–421.

Foellmi, C.: 2004, 'Another single hydrogen-rich Wolf-Rayet star in the SMC?'. *A&A* **416**, 291–295.

Foellmi, C., A. F. J. Moffat, and M. A. Guerrero: 2003a, 'Wolf-Rayet binaries in the Magellanic Clouds and implications for massive-star evolution - I. Small Magellanic Cloud'. *MNRAS* **338**, 360–388.

Foellmi, C., A. F. J. Moffat, and M. A. Guerrero: 2003b, 'Wolf-Rayet binaries in the Magellanic Clouds and implications for massive-star evolution - II. Large Magellanic Cloud'. *MNRAS* **338**, 1025–1056.

Foellmi, C., A. F. J. Moffat, and S. V. Marchenko: 2005, 'The massive eclipsing LMC Wolf-Rayet binary BAT99-129. 1. Orbital parameters, hydrogen content and spectroscopic characteristics'. *A&A* p. submitted.

Hamann, W.-R. and L. Koesterke: 2000, 'WN stars in the LMC: Parameters and atmospheric abundances'. *A&A* **360**, 647–655.

arXiv:astro-ph/0510138v2 20 Nov 2005

# klu9.clo

Kluwer Academic Publishers

1998/02/11

**Abstract.** This internal file takes care of list definitions and 'general' point size options.

## Table of Contents

1 Implementation 2
1.1 Section size commands 2
1.2 Various values 2
1.3 Textheight and textwidth 3
1.4 Lists 4
1.5 Float separation parameters 5

© 2008 *Kluwer Academic Publishers. Printed in the Netherlands.*

# 1. Implementation

```
\ProvidesFile{klu9.clo}[\filedate ]
```

## 1.1. SECTION SIZE COMMANDS

added command: `\little`. This is identical to `\tiny` here. Allowed type provided values: 5/6, 6/7, 7/8, 8/9.5, 9/11, 10/12, 11/13, 12/14, 14/18, 17/22, 20/25.

```
\renewcommand\normalsize{%
   \@setfontsize\normalsize\@ixpt{11}%
   \abovedisplayskip 8.5\p@ \@plus3\p@ \@minus4\p@
   \abovedisplayshortskip \z@ \@plus2\p@
   \belowdisplayshortskip 4\p@ \@plus2\p@ \@minus2\p@
   \belowdisplayskip \abovedisplayskip
   \let\listi\@listI}
\normalsize
\newcommand\small{%
   \@setfontsize\small\@viiipt{9.5}%
   \abovedisplayskip 6\p@ \@plus2\p@ \@minus4\p@
   \abovedisplayshortskip \z@ \@plus\p@
   \belowdisplayshortskip 3\p@ \@plus\p@ \@minus2\p@
   \def\@listi{\leftmargin\leftmargini
               \topsep 3\p@ \@plus\p@ \@minus\p@
               \parsep 2\p@ \@plus\p@ \@minus\p@
               \itemsep \parsep}%
   \belowdisplayskip \abovedisplayskip
}
\newcommand\footnotesize{%
   \@setfontsize\footnotesize\@viipt{8}%
   \abovedisplayskip 4\p@ \@plus2\p@ \@minus2\p@
   \abovedisplayshortskip \z@ \@plus\p@
   \belowdisplayshortskip 2\p@ \@plus\p@ \@minus1\p@
   \def\@listi{\leftmargin\leftmargini
               \topsep 2\p@ \@plus\p@ \@minus\p@
               \parsep 1\p@ \@plus\p@ \@minus\p@
               \itemsep \parsep}%
   \belowdisplayskip \abovedisplayskip
}
\newcommand\scriptsize{\@setfontsize\scriptsize\@vipt\@viipt}
\newcommand\little{\@setfontsize\little\@vpt\@vipt}
\newcommand\tiny{\@setfontsize\tiny\@vpt\@vipt}
\newcommand\large{\@setfontsize\large\@xpt\@xiipt}
\newcommand\Large{\@setfontsize\Large\@xiipt{14}}
\newcommand\LARGE{\@setfontsize\LARGE\@xivpt{18}}
\newcommand\huge{\@setfontsize\huge\@xviipt{22}}
\newcommand\Huge{\@setfontsize\Huge\@xxpt{25}}
```

## 1.2. VARIOUS VALUES

Note that `\hoffset` and `\voffset` are both compensated. This makes the calculations below easier.

```
\setlength\hoffset{-1in}
\setlength\voffset{-1in}
\setlength\parindent {14\p@}
\setlength\headheight{12\p@}
```

```
\setlength\headsep   {12\p@}
\setlength\topskip   {10\p@}
\setlength\footskip  {25\p@}
\setlength\marginparsep{10pt}
\setlength\marginparpush{5\p@}
\setlength\maxdepth  {.5\topskip}
\setlength\@maxdepth\maxdepth
\setlength\columnsep{10pt}
\setlength\columnseprule{0pt}
\setlength\fboxsep{3pt}
\setlength\fboxrule{.4pt}
```

### 1.3. Textheight and textwidth

These are the main reason for the existence of these files. For some stupid reason, LaTeX calculates textwidth out of `\paperwidth`. We did want to support letter paper, but our `\textwidth` is fixed, with the margins being calculated.

Presume `\textwidth` and `\marginparwidth` are set in the stylefile, or we're in trouble. The `2pc` value is used to compensate for the 'dead' corners in most laserprinters.

Calculations are done 'AtBeginDocument' to allow changes made in the preamble and later on in the stylefile.

```
\newdimen\id@boxheight
\AtBeginDocument{%
  \setlength\@tempdima{\paperwidth}%
  \addtolength\@tempdima{-\textwidth}%
  \divide\@tempdima by 2
  \setlength\@tempdimb\marginparwidth
  \addtolength\@tempdimb\marginparsep
  \addtolength\@tempdimb{2pc}%
  \ifdim \@tempdima <\@tempdimb
    \@settopoint\@tempdimb
    \GenericError{Pointsize}{Pointsize Error: Marginpars disabled}{}{You made
     your \string\textwidth\space (\the\textwidth) and
     \string\marginparwidth (\the\marginparwidth) too wide.\MessageBreak
     The allowed value for margin space: (\the\@tempdima). Needed value:
     (\the\@tempdimb).\MessageBreak
     This is not enough,
     so I will set \string\marginparwidth\space  to 0pt.\MessageBreak
     Let's hope that fixes it.
    }%
    \marginparwidth \z@
    \marginparsep \z@
  \fi
  \ifdim \@tempdima <2pc
    \@tempdimb=\paperwidth
    \advance\@tempdimb by -4pc
    \@settopoint\@tempdimb
    \GenericError{Pointsize}{Pointsize Error: Invalid sizes given}{}{You
    made your \string\textwidth\space (\the\textwidth)
    wider than the available total\MessageBreak
    (Which is: \the\@tempdimb). Please press X and try again.
    }%
  \fi
  \oddsidemargin \@tempdima
  \evensidemargin \@tempdima
```

These calculations are a lot easier. `\textheight` should have been set already. This does not check for the correct placement of the identification line!!

```
  \setlength\@tempdima{\paperheight}
  \addtolength\@tempdima{-\footskip}
  \addtolength\@tempdima{-\headheight}
  \addtolength\@tempdima{-\headsep}
  \setlength\@tempdimb{\@tempdima}
  \addtolength\@tempdima{-\textheight}
  \divide\@tempdima by 2
  \ifdim \@tempdima <2pc
  \advance\@tempdimb by -4pc
  \@settopoint\@tempdimb
     \GenericError{Pointsize}{Pointsize Error: Invalid sizes given}{}{You
     made your \string\textheight\space (\the\textheight)
     more than the available total.\MessageBreak
     (Which is: \the\@tempdimb). Please press X and try again.
     }%
  \fi
  \setlength\topmargin{\@tempdima}
  \setlength\id@boxheight{\@tempdima}
  \advance\id@boxheight by -2pc
}
```

```
\setlength\footnotesep{6\p@}
\setlength{\skip\footins}{9\p@ \@plus 4\p@ \@minus 2\p@}
```

## 1.4. LISTS

List default values

```
\setlength\partopsep{2\p@ \@plus 1\p@ \@minus 1\p@}
\setlength{\leftmargini}{1.9em}
\setlength{\leftmarginii}{2em}
\setlength{\leftmarginiii}{1.7em}
\setlength{\leftmarginiv}{1.4em}
\setlength{\leftmarginv}{1em}
\setlength{\leftmarginvi}{1em}
\setlength{\labelsep}{.4em}
\setlength{\labelwidth}{\leftmargini}
\addtolength{\labelwidth}{-\labelsep}
```

Note that lists below level 3 do nothing else then readjusting the `\labelwidth`. This results in very small labels for the inner lists.

```
\def\@listI{%
  \leftmargin \leftmargini
  \topsep 8\p@ \@plus2\p@ \@minus2\p@
  \partopsep 2\p@ \@plus 1\p@ \@minus 1\p@
  \itemsep 4\p@ \@plus 2\p@ \@minus 1\p@
  \parsep 4\p@ \@plus 2\p@ \@minus 1\p@ }
\def\@listii{%
  \leftmargin \leftmarginii
  \labelwidth \leftmarginii
  \advance\labelwidth by -\labelsep
  \topsep 4.5\p@ \@plus 2\p@ \@minus 1\p@
  \parsep 2\p@ \@plus 1\p@ \@minus 1\p@
  \itemsep \parsep}
```

```
\def\@listiii{%
  \leftmargin \leftmarginiii
  \labelwidth \leftmarginiii
  \advance\labelwidth by -\labelsep
  \topsep 2\p@ \@plus 1\p@ \@minus 1\p@
  \parsep \z@
  \partopsep 1\p@ \@plus 0\p@ \@minus 1\p@
  \itemsep \topsep}
\def\@listiv{%
  \setlength{\leftmargin}{\leftmarginiv}%
  \setlength{\labelwidth}{\leftmarginiv}%
  \addtolength{\labelwidth}{-\labelsep}}
\def\@listv{%
  \setlength{\leftmargin}{\leftmarginv}%
  \setlength{\labelwidth}{\leftmarginv}%
  \addtolength{\labelwidth}{-\labelsep}}
\def\@listvi{%
  \setlength{\leftmargin}{\leftmarginvi}%
  \setlength{\labelwidth}{\leftmarginvi}%
  \addtolength{\labelwidth}{-\labelsep}}
\let\@listi\@listI
\@listi
```

### 1.5. Float separation parameters

Separation on text pages.

```
\setlength\floatsep{10\p@ \@plus 2\p@ \@minus 2\p@}
\setlength\textfloatsep{18\p@ \@plus 2\p@ \@minus 4\p@}
\setlength\intextsep{10\p@ \@plus 2\p@ \@minus 2\p@}
\setlength\dblfloatsep{10\p@ \@plus 2\p@ \@minus 2\p@}
\setlength\dbltextfloatsep{18\p@ \@plus 2\p@ \@minus 4\p@}
```

Separation on float pages

```
\setlength\@fptop{0\p@ \@plus 1fil}
\setlength\@fpsep{8\p@ \@plus 2fil}
\setlength\@fpbot{0\p@ \@plus 1fil}
\setlength\@dblfptop{0\p@ \@plus 1fil}
\setlength\@dblfpsep{8\p@ \@plus 2fil}
\setlength\@dblfpbot{0\p@ \@plus 1fil}

\endinput
```

arXiv:astro-ph/0510138v2 20 Nov 2005

# klut9.clo

Kluwer Academic Publishers

1998/02/11

**Abstract.** This internal file takes care of list definitions and 'general' point size options. This is a 'tight' file.

## Table of Contents

1 Implementation 2
1.1 Section size commands 2
1.2 Various values 2
1.3 Textheight and textwidth 3
1.4 Lists 4
1.5 Float separation parameters 5

© 2008 *Kluwer Academic Publishers. Printed in the Netherlands.*

# 1. Implementation

```
\ProvidesFile{klut9.clo}[\filedate ]
```

## 1.1. SECTION SIZE COMMANDS

added command: `\little`. This is identical to `\tiny` here. Allowed type provided values: 5/6, 6/7, 7/8, 8/9, 9/10.5, 10/11.5, 11/13, 12/14, 14/18, 17/22, 20/25.

```
\renewcommand\normalsize{%
  \@setfontsize\normalsize\@ixpt{10.5}%
  \abovedisplayskip 8.5\p@ \@plus3\p@ \@minus4\p@
  \abovedisplayshortskip \z@ \@plus2\p@
  \belowdisplayshortskip 4\p@ \@plus2\p@ \@minus2\p@
  \belowdisplayskip \abovedisplayskip
  \let\listi\@listI}
\normalsize
\newcommand\small{%
  \@setfontsize\small\@viiipt{9}%
  \abovedisplayskip 6\p@ \@plus2\p@ \@minus4\p@
  \abovedisplayshortskip \z@ \@plus\p@
  \belowdisplayshortskip 3\p@ \@plus\p@ \@minus2\p@
  \def\@listi{\leftmargin\leftmargini
             \topsep 3\p@ \@plus\p@ \@minus\p@
             \parsep 2\p@ \@plus\p@ \@minus\p@
             \itemsep \parsep}%
  \belowdisplayskip \abovedisplayskip
}
\newcommand\footnotesize{%
  \@setfontsize\footnotesize\@viipt{8}%
  \abovedisplayskip 4\p@ \@plus2\p@ \@minus2\p@
  \abovedisplayshortskip \z@ \@plus\p@
  \belowdisplayshortskip 2\p@ \@plus\p@ \@minus1\p@
  \def\@listi{\leftmargin\leftmargini
             \topsep 2\p@ \@plus\p@ \@minus\p@
             \parsep 1\p@ \@plus\p@ \@minus\p@
             \itemsep \parsep}%
  \belowdisplayskip \abovedisplayskip
}
\newcommand\scriptsize{\@setfontsize\scriptsize\@vipt\@viipt}
\newcommand\little{\@setfontsize\little\@vpt\@vipt}
\newcommand\tiny{\@setfontsize\tiny\@vpt\@vipt}
\newcommand\large{\@setfontsize\large\@xpt{11.5}}
\newcommand\Large{\@setfontsize\Large\@xiipt{14}}
\newcommand\LARGE{\@setfontsize\LARGE\@xivpt{18}}
\newcommand\huge{\@setfontsize\huge\@xviipt{22}}
\newcommand\Huge{\@setfontsize\Huge\@xxpt{25}}
```

## 1.2. VARIOUS VALUES

Note that `\hoffset` and `\voffset` are both compensated. This makes the calculations below easier.

```
\setlength\hoffset{-1in}
\setlength\voffset{-1in}
\setlength\parindent {14\p@}
\setlength\headheight{12\p@}
```

```
\setlength\headsep   {12\p@}
\setlength\topskip   {10\p@}
\setlength\footskip  {25\p@}
\setlength\marginparsep{10pt}
\setlength\marginparpush{5\p@}
\setlength\maxdepth  {.5\topskip}
\setlength\@maxdepth\maxdepth
\setlength\columnsep{10pt}
\setlength\columnseprule{0pt}
\setlength\fboxsep{3pt}
\setlength\fboxrule{.4pt}
```

### 1.3. Textheight and textwidth

These are the main reason for the existence of these files. For some stupid reason, LaTeX calculates textwidth out of `\paperwidth`. We did want to support letter paper, but our `\textwidth` is fixed, with the margins being calculated.

Presume `\textwidth` and `\marginparwidth` are set in the stylefile, or we're in trouble. The `2pc` value is used to compensate for the 'dead' corners in most laserprinters.

Calculations are done 'AtBeginDocument' to allow changes made in the preamble and later on in the stylefile.

```
\newdimen\id@boxheight
\AtBeginDocument{%
  \setlength\@tempdima{\paperwidth}%
  \addtolength\@tempdima{-\textwidth}%
  \divide\@tempdima by 2
  \setlength\@tempdimb\marginparwidth
  \addtolength\@tempdimb\marginparsep
  \addtolength\@tempdimb{2pc}%
  \ifdim \@tempdima <\@tempdimb
     \@settopoint\@tempdimb
     \GenericError{Pointsize}{Pointsize Error: Marginpars disabled}{}{You made
      your \string\textwidth\space (\the\textwidth) and
      \string\marginparwidth (\the\marginparwidth) too wide.\MessageBreak
      The allowed value for margin space: (\the\@tempdima). Needed value:
      (\the\@tempdimb).\MessageBreak
      This is not enough,
      so I will set \string\marginparwidth\space  to 0pt.\MessageBreak
      Let's hope that fixes it.
     }%
     \marginparwidth \z@
     \marginparsep \z@
  \fi
  \ifdim \@tempdima <2pc
     \@tempdimb=\paperwidth
     \advance\@tempdimb by -4pc
     \@settopoint\@tempdimb
     \GenericError{Pointsize}{Pointsize Error: Invalid sizes given}{}{You
     made your \string\textwidth\space (\the\textwidth)
     wider than the available total\MessageBreak
     (Which is: \the\@tempdimb). Please press X and try again.
     }%
  \fi
  \oddsidemargin \@tempdima
  \evensidemargin \@tempdima
```

These calculations are a lot easier. `\textheight` should have been set already. This does not check for the correct placement of the identification line!!

```
  \setlength\@tempdima{\paperheight}
  \addtolength\@tempdima{-\footskip}
  \addtolength\@tempdima{-\headheight}
  \addtolength\@tempdima{-\headsep}
  \setlength\@tempdimb{\@tempdima}
  \addtolength\@tempdima{-\textheight}
  \divide\@tempdima by 2
  \ifdim \@tempdima <2pc
  \advance\@tempdimb by -4pc
  \@settopoint\@tempdimb
     \GenericError{Pointsize}{Pointsize Error: Invalid sizes given}{}{You
     made your \string\textheight\space (\the\textheight)
     more than the available total.\MessageBreak
     (Which is: \the\@tempdimb). Please press X and try again.
     }%
  \fi
  \setlength\topmargin{\@tempdima}
  \setlength\id@boxheight{\@tempdima}
  \advance\id@boxheight by -2pc
}
```

```
\setlength\footnotesep{6\p@}
\setlength{\skip\footins}{9\p@ \@plus 4\p@ \@minus 2\p@}
```

### 1.4. Lists

List default values

```
\setlength\partopsep{2\p@ \@plus 1\p@ \@minus 1\p@}
\setlength{\leftmargini}{1.9em}
\setlength{\leftmarginii}{2em}
\setlength{\leftmarginiii}{1.7em}
\setlength{\leftmarginiv}{1.4em}
\setlength{\leftmarginv}{1em}
\setlength{\leftmarginvi}{1em}
\setlength{\labelsep}{.4em}
\setlength{\labelwidth}{\leftmargini}
\addtolength{\labelwidth}{-\labelsep}
```

Note that lists below level 3 do nothing else then readjusting the `\labelwidth`. This results in very small labels for the inner lists.

```
\def\@listI{%
  \leftmargin \leftmargini
  \topsep 8\p@ \@plus2\p@ \@minus2\p@
  \partopsep 2\p@ \@plus 1\p@ \@minus 1\p@
  \itemsep 4\p@ \@plus 2\p@ \@minus 1\p@
  \parsep 4\p@ \@plus 2\p@ \@minus 1\p@ }
\def\@listii{%
  \leftmargin \leftmarginii
  \labelwidth \leftmarginii
  \advance\labelwidth by -\labelsep
  \topsep 4.5\p@ \@plus 2\p@ \@minus 1\p@
  \parsep 2\p@ \@plus 1\p@ \@minus 1\p@
  \itemsep \parsep}
```

```
\def\@listiii{%
  \leftmargin \leftmarginiii
  \labelwidth \leftmarginiii
  \advance\labelwidth by -\labelsep
  \topsep 2\p@ \@plus 1\p@ \@minus 1\p@
  \parsep \z@
  \partopsep 1\p@ \@plus 0\p@ \@minus 1\p@
  \itemsep \topsep}
\def\@listiv{%
  \setlength{\leftmargin}{\leftmarginiv}%
  \setlength{\labelwidth}{\leftmarginiv}%
  \addtolength{\labelwidth}{-\labelsep}}
\def\@listv{%
  \setlength{\leftmargin}{\leftmarginv}%
  \setlength{\labelwidth}{\leftmarginv}%
  \addtolength{\labelwidth}{-\labelsep}}
\def\@listvi{%
  \setlength{\leftmargin}{\leftmarginvi}%
  \setlength{\labelwidth}{\leftmarginvi}%
  \addtolength{\labelwidth}{-\labelsep}}
\let\@listi\@listI
\@listi
```

### 1.5. Float separation parameters

Separation on text pages.

```
\setlength\floatsep{10\p@ \@plus 2\p@ \@minus 2\p@}
\setlength\textfloatsep{18\p@ \@plus 2\p@ \@minus 4\p@}
\setlength\intextsep{10\p@ \@plus 2\p@ \@minus 2\p@}
\setlength\dblfloatsep{10\p@ \@plus 2\p@ \@minus 2\p@}
\setlength\dbltextfloatsep{18\p@ \@plus 2\p@ \@minus 4\p@}
```

Separation on float pages

```
\setlength\@fptop{0\p@ \@plus 1fil}
\setlength\@fpsep{8\p@ \@plus 2fil}
\setlength\@fpbot{0\p@ \@plus 1fil}
\setlength\@dblfptop{0\p@ \@plus 1fil}
\setlength\@dblfpsep{8\p@ \@plus 2fil}
\setlength\@dblfpbot{0\p@ \@plus 1fil}

\endinput
```

arXiv:astro-ph/0510138v2 20 Nov 2005

# klu10.clo

Kluwer Academic Publishers

1998/02/11

**Abstract.** This internal file takes care of list definitions and 'general' point size options.

## Table of Contents

1 Implementation 2
  1.1 Section size commands 2
  1.2 Various values 3
  1.3 Textheight and textwidth 3
  1.4 Lists 4
  1.5 Float separation parameters 5

© 2008 *Kluwer Academic Publishers. Printed in the Netherlands.*

## 1. Implementation

```
\ProvidesFile{klu10.clo}[\filedate ]
```

### 1.1. Section size commands

added command: `\little`. This between `\scriptsize` and `\tiny`. Allowed type provided values: 5/6, 6/7, 7/8, 8/9.5, 9/11, 10/12, 12/14, 14/18, 17/22, 20/25, 25/30.

```
\renewcommand\normalsize{%
   \@setfontsize\normalsize\@xpt\@xiipt
   \abovedisplayskip 10\p@ \@plus 2\p@ \@minus5\p@
   \abovedisplayshortskip \z@ \@plus 3\p@
   \belowdisplayshortskip 6\p@ \@plus 3\p@ \@minus3\p@
   \belowdisplayskip \abovedisplayskip
   \let\@listi\@listI}
\normalsize
\newcommand\small{%
   \@setfontsize\small\@ixpt{11}%
   \abovedisplayskip 8.5\p@ \@plus3\p@ \@minus4\p@
   \abovedisplayshortskip \z@ \@plus2\p@
   \belowdisplayshortskip 4\p@ \@plus2\p@ \@minus2\p@
   \def\@listi{\leftmargin\leftmargini
               \topsep 4\p@ \@plus2\p@ \@minus2\p@
               \parsep 2\p@ \@plus\p@ \@minus\p@
               \itemsep \parsep}%
   \belowdisplayskip \abovedisplayskip
}
\newcommand\footnotesize{%
   \@setfontsize\footnotesize\@viiipt{9.5}%
   \abovedisplayskip 6\p@ \@plus2\p@ \@minus4\p@
   \abovedisplayshortskip \z@ \@plus\p@
   \belowdisplayshortskip 3\p@ \@plus\p@ \@minus2\p@
   \def\@listi{\leftmargin\leftmargini
               \topsep 3\p@ \@plus\p@ \@minus\p@
               \parsep 2\p@ \@plus\p@ \@minus\p@
               \itemsep \parsep}%
   \belowdisplayskip \abovedisplayskip
}
\newcommand\scriptsize{\@setfontsize\scriptsize\@viipt\@viiipt}
\newcommand\little{\@setfontsize\little\@vipt\@viipt}
\newcommand\tiny{\@setfontsize\tiny\@vpt\@vipt}
\newcommand\large{\@setfontsize\large\@xiipt{14}}
\newcommand\Large{\@setfontsize\Large\@xivpt{18}}
\newcommand\LARGE{\@setfontsize\LARGE\@xviipt{22}}
\newcommand\huge{\@setfontsize\huge\@xxpt{25}}
\newcommand\Huge{\@setfontsize\Huge\@xxvpt{30}}
```

### 1.2. Various values

Note that `\hoffset` and `\voffset` are both compensated. This makes the calculations below easier.

```
\setlength\hoffset{-1.5cm}
\setlength\voffset{0pt}
\setlength\parindent {14\p@}
\setlength\headheight{12\p@}
\setlength\headsep   {12\p@}
\setlength\topskip   {10\p@}
\setlength\footskip  {27.5\p@}
\setlength\marginparsep{10pt}
\setlength\marginparpush{5\p@}
\setlength\maxdepth  {.5\topskip}
\setlength\@maxdepth\maxdepth
\setlength\columnsep{10pt}
\setlength\columnseprule{0pt}
\setlength\fboxsep{3pt}
\setlength\fboxrule{.4pt}
```

### 1.3. Textheight and textwidth

These are the main reason for the existence of these files. For some stupid reason, LaTeX calculates textwidth out of `\paperwidth`. We did want to support letter paper, but our `\textwidth` is fixed, with the margins being calculated.

Presume `\textwidth` and `\marginparwidth` are set in the stylefile, or we're in trouble. The `2pc` value is used to compensate for the 'dead' corners in most laserprinters.

Calculations are done 'AtBeginDocument' to allow changes made in the preamble and later on in the stylefile.

```
\newdimen\id@boxheight
\AtBeginDocument{%
  \setlength\@tempdima{\paperwidth}%
  \addtolength\@tempdima{-\textwidth}%
  \divide\@tempdima by 2
  \setlength\@tempdimb\marginparwidth
  \addtolength\@tempdimb\marginparsep
  \addtolength\@tempdimb{2pc}%
  \ifdim \@tempdima <\@tempdimb
     \@settopoint\@tempdimb
     \GenericError{Pointsize}{Pointsize Error: Marginpars disabled}{}{You made
      your \string\textwidth\space (\the\textwidth) and
      \string\marginparwidth (\the\marginparwidth) too wide.\MessageBreak
      The allowed value for margin space: (\the\@tempdima). Needed value:
      (\the\@tempdimb).\MessageBreak
      This is not enough,
      so I will set \string\marginparwidth\space  to 0pt.\MessageBreak
      Let's hope that fixes it.
     }%
     \marginparwidth \z@
     \marginparsep \z@
  \fi
  \ifdim \@tempdima <2pc
     \@tempdimb=\paperwidth
    \advance\@tempdimb by -4pc
     \@settopoint\@tempdimb
     \GenericError{Pointsize}{Pointsize Error: Invalid sizes given}{}{You
     made your \string\textwidth\space (\the\textwidth)
     wider than the available total\MessageBreak
     (Which is: \the\@tempdimb). Please press X and try again.
     }%
  \fi
  \oddsidemargin 1in
  \evensidemargin 1in
```

These calculations are a lot easier. `\textheight` should have been set already. This does not check for the correct placement of the identification line!!

```
  \setlength\@tempdima{\paperheight}
  \addtolength\@tempdima{-\footskip}
  \addtolength\@tempdima{-\headheight}
  \addtolength\@tempdima{-\headsep}
  \setlength\@tempdimb{\@tempdima}
  \addtolength\@tempdima{-\textheight}
  \divide\@tempdima by 2
  \ifdim \@tempdima <2pc
  \advance\@tempdimb by -4pc
  \@settopoint\@tempdimb
     \GenericError{Pointsize}{Pointsize Error: Invalid sizes given}{}{You
     made your \string\textheight\space (\the\textheight)
     more than the available total.\MessageBreak
     (Which is: \the\@tempdimb). Please press X and try again.
     }%
  \fi
  \setlength\topmargin{0pt}
  \setlength\id@boxheight{\@tempdima}
  \advance\id@boxheight by -2pc
}
```

```
\setlength\footnotesep{6.65\p@}
\setlength{\skip\footins}{9\p@ \@plus 4\p@ \@minus 2\p@}
```

### 1.4. Lists

List default values

```
\setlength\partopsep{2\p@ \@plus 1\p@ \@minus 1\p@}
\setlength{\leftmargini}{2em}
\setlength{\leftmarginii}{2.2em}
```

```
\setlength{\leftmarginiii}{1.87em}
\setlength{\leftmarginiv}{1.7em}
\setlength{\leftmarginv}{1em}
\setlength{\leftmarginvi}{1em}
\setlength{\labelsep}{.4em}
\setlength{\labelwidth}{\leftmargini}
\addtolength{\labelwidth}{-\labelsep}
```

Note that lists below level 3 do nothing else then readjusting the `\labelwidth`. This results in very small labels for the inner lists.

```
\def\@listI{%
  \leftmargin \leftmargini
  \topsep  9\p@ \@plus 3\p@ \@minus 5\p@
  \partopsep 3\p@ \@plus 1\p@ \@minus 2\p@
  \itemsep 4.5\p@ \@plus 2\p@ \@minus 1\p@
  \parsep 4.5\p@ \@plus 2\p@ \@minus 1\p@ }
\def\@listii{%
  \leftmargin \leftmarginii
  \labelwidth \leftmarginii
  \advance\labelwidth by -\labelsep
  \topsep 4.5\p@ \@plus 2\p@ \@minus 1\p@
  \parsep 2\p@ \@plus 1\p@ \@minus 1\p@
  \itemsep \parsep}
\def\@listiii{%
  \leftmargin \leftmarginiii
  \labelwidth \leftmarginiii
  \advance\labelwidth by -\labelsep
  \topsep 2\p@ \@plus 1\p@ \@minus 1\p@
  \parsep \z@
  \partopsep 1\p@ \@plus 0\p@ \@minus 1\p@
  \itemsep \topsep}
\def\@listiv{%
  \setlength{\leftmargin}{\leftmarginiv}%
  \setlength{\labelwidth}{\leftmarginiv}%
  \addtolength{\labelwidth}{-\labelsep}}
\def\@listv{%
  \setlength{\leftmargin}{\leftmarginv}%
  \setlength{\labelwidth}{\leftmarginv}%
  \addtolength{\labelwidth}{-\labelsep}}
\def\@listvi{%
  \setlength{\leftmargin}{\leftmarginvi}%
  \setlength{\labelwidth}{\leftmarginvi}%
  \addtolength{\labelwidth}{-\labelsep}}
\let\@listi\@listI
\@listi
```

### 1.5. Float separation parameters

Separation on text pages.

```
\setlength\floatsep{12\p@ \@plus 2\p@ \@minus 2\p@}
\setlength\textfloatsep{20\p@ \@plus 2\p@ \@minus 4\p@}
\setlength\intextsep{12\p@ \@plus 2\p@ \@minus 2\p@}
\setlength\dblfloatsep{12\p@ \@plus 2\p@ \@minus 2\p@}
\setlength\dbltextfloatsep{20\p@ \@plus 2\p@ \@minus 4\p@}
```

Separation on float pages

```
\setlength\@fptop{0\p@ \@plus 1fil}
\setlength\@fpsep{8\p@ \@plus 2fil}
\setlength\@fpbot{0\p@ \@plus 1fil}
\setlength\@dblfptop{0\p@ \@plus 1fil}
\setlength\@dblfpsep{8\p@ \@plus 2fil}
\setlength\@dblfpbot{0\p@ \@plus 1fil}

\endinput
```

arXiv:astro-ph/0510138v2 20 Nov 2005

# klut10.clo

Kluwer Academic Publishers

1998/02/11

**Abstract.** This internal file takes care of list definitions and 'general' point size options. This is a the 'tight' file.

## Table of Contents

1 Implementation 2
    1.1 Section size commands 2
    1.2 Various values 3
    1.3 Textheight and textwidth 3
    1.4 Lists 4
    1.5 Float separation parameters 5

© 2008 *Kluwer Academic Publishers. Printed in the Netherlands.*

# 1. Implementation

```
\ProvidesFile{klut10.clo}[\filedate ]
```

## 1.1. Section size commands

added command: `\little`. This between `\scriptsize` and `\tiny`. Allowed type provided values: 5/6, 6/7, 7/8, 8/9, 9/10.5, 10/11.5, 12/14, 14/18, 17/22, 20/25, 25/30.

```
\renewcommand\normalsize{%
   \@setfontsize\normalsize\@xpt{11.5}%
   \abovedisplayskip 10\p@ \@plus 2\p@ \@minus5\p@
   \abovedisplayshortskip \z@ \@plus 3\p@
   \belowdisplayshortskip 6\p@ \@plus 3\p@ \@minus3\p@
   \belowdisplayskip \abovedisplayskip
   \let\@listi\@listI}
\normalsize
\newcommand\small{%
   \@setfontsize\small\@ixpt{10.5}%
   \abovedisplayskip 8.5\p@ \@plus3\p@ \@minus4\p@
   \abovedisplayshortskip \z@ \@plus2\p@
   \belowdisplayshortskip 4\p@ \@plus2\p@ \@minus2\p@
   \def\@listi{\leftmargin\leftmargini
               \topsep 4\p@ \@plus2\p@ \@minus2\p@
               \parsep 2\p@ \@plus\p@ \@minus\p@
               \itemsep \parsep}%
   \belowdisplayskip \abovedisplayskip
}
\newcommand\footnotesize{%
   \@setfontsize\footnotesize\@viiipt{9}%
   \abovedisplayskip 6\p@ \@plus2\p@ \@minus4\p@
   \abovedisplayshortskip \z@ \@plus\p@
   \belowdisplayshortskip 3\p@ \@plus\p@ \@minus2\p@
   \def\@listi{\leftmargin\leftmargini
               \topsep 3\p@ \@plus\p@ \@minus\p@
               \parsep 2\p@ \@plus\p@ \@minus\p@
               \itemsep \parsep}%
   \belowdisplayskip \abovedisplayskip
}
\newcommand\scriptsize{\@setfontsize\scriptsize\@viipt\@viiipt}
\newcommand\little{\@setfontsize\little\@vipt\@viipt}
\newcommand\tiny{\@setfontsize\tiny\@vpt\@vipt}
\newcommand\large{\@setfontsize\large\@xiipt{14}}
\newcommand\Large{\@setfontsize\Large\@xivpt{18}}
\newcommand\LARGE{\@setfontsize\LARGE\@xviipt{22}}
\newcommand\huge{\@setfontsize\huge\@xxpt{25}}
\newcommand\Huge{\@setfontsize\Huge\@xxvpt{30}}
```

### 1.2. Various values

Note that `\hoffset` and `\voffset` are both compensated. This makes the calculations below easier.

```
\setlength\hoffset{-1in}
\setlength\voffset{-1in}
\setlength\parindent {14\p@}
\setlength\headheight{12\p@}
\setlength\headsep   {12\p@}
\setlength\topskip   {10\p@}
\setlength\footskip  {27.5\p@}
\setlength\marginparsep{10pt}
\setlength\marginparpush{5\p@}
\setlength\maxdepth  {.5\topskip}
\setlength\@maxdepth\maxdepth
\setlength\columnsep{10pt}
\setlength\columnseprule{0pt}
\setlength\fboxsep{3pt}
\setlength\fboxrule{.4pt}
```

### 1.3. Textheight and textwidth

These are the main reason for the existence of these files. For some stupid reason, LaTeX calculates textwidth out of `\paperwidth`. We did want to support letter paper, but our `\textwidth` is fixed, with the margins being calculated.

Presume `\textwidth` and `\marginparwidth` are set in the stylefile, or we're in trouble. The 2pc value is used to compensate for the 'dead' corners in most laserprinters.

Calculations are done 'AtBeginDocument' to allow changes made in the preamble and later on in the stylefile.

```
\newdimen\id@boxheight
\AtBeginDocument{%
  \setlength\@tempdima{\paperwidth}%
  \addtolength\@tempdima{-\textwidth}%
  \divide\@tempdima by 2
  \setlength\@tempdimb\marginparwidth
  \addtolength\@tempdimb\marginparsep
  \addtolength\@tempdimb{2pc}%
  \ifdim \@tempdima <\@tempdimb
     \@settopoint\@tempdimb
     \GenericError{Pointsize}{Pointsize Error: Marginpars disabled}{}{You made
      your \string\textwidth\space (\the\textwidth) and
      \string\marginparwidth (\the\marginparwidth) too wide.\MessageBreak
      The allowed value for margin space: (\the\@tempdima). Needed value:
      (\the\@tempdimb).\MessageBreak
      This is not enough,
      so I will set \string\marginparwidth\space  to 0pt.\MessageBreak
      Let's hope that fixes it.
     }%
     \marginparwidth \z@
     \marginparsep \z@
  \fi
  \ifdim \@tempdima <2pc
     \@tempdimb=\paperwidth
     \advance\@tempdimb by -4pc
     \@settopoint\@tempdimb
     \GenericError{Pointsize}{Pointsize Error: Invalid sizes given}{}{You
     made your \string\textwidth\space (\the\textwidth)
     wider than the available total\MessageBreak
     (Which is: \the\@tempdimb). Please press X and try again.
     }%
  \fi
  \oddsidemargin \@tempdima
  \evensidemargin \@tempdima
```

These calculations are a lot easier. `\textheight` should have been set already. This does not check for the correct placement of the identification line!!

```
  \setlength\@tempdima{\paperheight}
  \addtolength\@tempdima{-\footskip}
  \addtolength\@tempdima{-\headheight}
  \addtolength\@tempdima{-\headsep}
  \setlength\@tempdimb{\@tempdima}
  \addtolength\@tempdima{-\textheight}
  \divide\@tempdima by 2
  \ifdim \@tempdima <2pc
  \advance\@tempdimb by -4pc
  \@settopoint\@tempdimb
     \GenericError{Pointsize}{Pointsize Error: Invalid sizes given}{}{You
     made your \string\textheight\space (\the\textheight)
     more than the available total.\MessageBreak
     (Which is: \the\@tempdimb). Please press X and try again.
     }%
  \fi
  \setlength\topmargin{\@tempdima}
  \setlength\id@boxheight{\@tempdima}
  \advance\id@boxheight by -2pc
}
```

```
\setlength\footnotesep{6.65\p@}
\setlength{\skip\footins}{9\p@ \@plus 4\p@ \@minus 2\p@}
```

## 1.4. LISTS

List default values

```
\setlength\partopsep{2\p@ \@plus 1\p@ \@minus 1\p@}
\setlength{\leftmargini}{2em}
\setlength{\leftmarginii}{2.2em}
```

```
\setlength{\leftmarginiii}{1.87em}
\setlength{\leftmarginiv}{1.7em}
\setlength{\leftmarginv}{1em}
\setlength{\leftmarginvi}{1em}
\setlength{\labelsep}{.4em}
\setlength{\labelwidth}{\leftmargini}
\addtolength{\labelwidth}{-\labelsep}
```

Note that lists below level 3 do nothing else then readjusting the `\labelwidth`. This results in very small labels for the inner lists.

```
\def\@listI{%
  \leftmargin \leftmargini
  \topsep  9\p@ \@plus 3\p@ \@minus 5\p@
  \partopsep 3\p@ \@plus 1\p@ \@minus 2\p@
  \itemsep 4.5\p@ \@plus 2\p@ \@minus 1\p@
  \parsep 4.5\p@ \@plus 2\p@ \@minus 1\p@ }
\def\@listii{%
  \leftmargin \leftmarginii
  \labelwidth \leftmarginii
  \advance\labelwidth by -\labelsep
  \topsep 4.5\p@ \@plus 2\p@ \@minus 1\p@
  \parsep 2\p@ \@plus 1\p@ \@minus 1\p@
  \itemsep \parsep}
\def\@listiii{%
  \leftmargin \leftmarginiii
  \labelwidth \leftmarginiii
  \advance\labelwidth by -\labelsep
  \topsep 2\p@ \@plus 1\p@ \@minus 1\p@
  \parsep \z@
  \partopsep 1\p@ \@plus 0\p@ \@minus 1\p@
  \itemsep \topsep}
\def\@listiv{%
  \setlength{\leftmargin}{\leftmarginiv}%
  \setlength{\labelwidth}{\leftmarginiv}%
  \addtolength{\labelwidth}{-\labelsep}}
\def\@listv{%
  \setlength{\leftmargin}{\leftmarginv}%
  \setlength{\labelwidth}{\leftmarginv}%
  \addtolength{\labelwidth}{-\labelsep}}
\def\@listvi{%
  \setlength{\leftmargin}{\leftmarginvi}%
  \setlength{\labelwidth}{\leftmarginvi}%
  \addtolength{\labelwidth}{-\labelsep}}
\let\@listi\@listI
\@listi
```

### 1.5. FLOAT SEPARATION PARAMETERS

Separation on text pages.

```
\setlength\floatsep{12\p@ \@plus 2\p@ \@minus 2\p@}
\setlength\textfloatsep{20\p@ \@plus 2\p@ \@minus 4\p@}
\setlength\intextsep{12\p@ \@plus 2\p@ \@minus 2\p@}
\setlength\dblfloatsep{12\p@ \@plus 2\p@ \@minus 2\p@}
\setlength\dbltextfloatsep{20\p@ \@plus 2\p@ \@minus 4\p@}
```

Separation on float pages

```
\setlength\@fptop{0\p@ \@plus 1fil}
\setlength\@fpsep{8\p@ \@plus 2fil}
\setlength\@fpbot{0\p@ \@plus 1fil}
\setlength\@dblfptop{0\p@ \@plus 1fil}
\setlength\@dblfpsep{8\p@ \@plus 2fil}
\setlength\@dblfpbot{0\p@ \@plus 1fil}

\endinput
```

arXiv:astro-ph/0510138v2 20 Nov 2005

# klut11.clo

Kluwer Academic Publishers

1998/02/11

**Abstract.** This internal file takes care of list definitions and ‘general’ point size options. This is a the ‘tight’ file.

## Table of Contents

1 Implementation 2
  1.1 Section size commands 2
  1.2 Various values 3
  1.3 Textheight and textwidth 3
  1.4 Lists 5
  1.5 Float separation parameters 6

© 2008 *Kluwer Academic Publishers. Printed in the Netherlands.*

# 1. Implementation

```
\ProvidesFile{klut11.clo}[\filedate ]
```

## 1.1. SECTION SIZE COMMANDS

added command: `\little`. This between `\scriptsize` and `\tiny`. Allowed type provided values: 6/7, 7/8, 8/9, 9/10.5, 10/11.5, 11/12.5, 12/14, 14/18, 17/22, 20/25, 25/30.

```
\renewcommand\normalsize{%
   \@setfontsize\normalsize\@xipt{12.5}%
   \abovedisplayskip 10\p@ \@plus 2\p@ \@minus5\p@
   \abovedisplayshortskip \z@ \@plus 3\p@
   \belowdisplayshortskip 6\p@ \@plus 3\p@ \@minus3\p@
   \belowdisplayskip \abovedisplayskip
   \let\@listi\@listI}
\normalsize
\newcommand\small{%
   \@setfontsize\small\@xpt{11.5}%
   \abovedisplayskip 9\p@ \@plus3\p@ \@minus4\p@
   \abovedisplayshortskip \z@ \@plus2\p@
   \belowdisplayshortskip 5\p@ \@plus2\p@ \@minus2\p@
   \def\@listi{\leftmargin\leftmargini
               \topsep 4\p@ \@plus2\p@ \@minus2\p@
               \parsep 2\p@ \@plus\p@ \@minus\p@
               \itemsep \parsep}%
   \belowdisplayskip \abovedisplayskip
}
\newcommand\footnotesize{%
   \@setfontsize\footnotesize\@ixpt{10.5}%
   \abovedisplayskip 6\p@ \@plus2\p@ \@minus4\p@
   \abovedisplayshortskip \z@ \@plus\p@
   \belowdisplayshortskip 3\p@ \@plus\p@ \@minus2\p@
   \def\@listi{\leftmargin\leftmargini
               \topsep 3\p@ \@plus\p@ \@minus\p@
               \parsep 2\p@ \@plus\p@ \@minus\p@
               \itemsep \parsep}%
   \belowdisplayskip \abovedisplayskip
}
\newcommand\scriptsize{\@setfontsize\scriptsize\@viiipt{9.5}}
\newcommand\little{\@setfontsize\little\@viipt\@viiipt}
\newcommand\tiny{\@setfontsize\tiny\@vipt\@viipt}
\newcommand\large{\@setfontsize\large\@xiipt{14}}
\newcommand\Large{\@setfontsize\Large\@xivpt{18}}
\newcommand\LARGE{\@setfontsize\LARGE\@xviipt{22}}
\newcommand\huge{\@setfontsize\huge\@xxpt{25}}
```

```
\newcommand\Huge{\@setfontsize\Huge\@xxvpt{30}}
```

## 1.2. VARIOUS VALUES

Note that `\hoffset` and `\voffset` are both compensated. This makes the calculations below easier.

```
\setlength\hoffset{-1in}
\setlength\voffset{-1in}
\setlength\parindent {14\p@}
\setlength\headheight{12\p@}
\setlength\headsep   {12\p@}
\setlength\topskip   {10\p@}
\setlength\footskip  {27.5\p@}
\setlength\marginparsep{10pt}
\setlength\marginparpush{5\p@}
\setlength\maxdepth  {.5\topskip}
\setlength\@maxdepth\maxdepth
\setlength\columnsep{10pt}
\setlength\columnseprule{0pt}
\setlength\fboxsep{3pt}
\setlength\fboxrule{.4pt}
```

## 1.3. TEXTHEIGHT AND TEXTWIDTH

These are the main reason for the existence of these files. For some stupid reason, LaTeX calculates textwidth out of `\paperwidth`. We did want to support letter paper, but our `\textwidth` is fixed, with the margins being calculated.

Presume `\textwidth` and `\marginparwidth` are set in the stylefile, or we're in trouble. The `2pc` value is used to compensate for the 'dead' corners in most laserprinters.

Calculations are done 'AtBeginDocument' to allow changes made in the preamble and later on in the stylefile.

```
\newdimen\id@boxheight
\AtBeginDocument{%
  \setlength\@tempdima{\paperwidth}%
  \addtolength\@tempdima{-\textwidth}%
  \divide\@tempdima by 2
  \setlength\@tempdimb\marginparwidth
  \addtolength\@tempdimb\marginparsep
  \addtolength\@tempdimb{2pc}%
  \ifdim \@tempdima <\@tempdimb
     \@settopoint\@tempdimb
     \GenericError{Pointsize}{Pointsize Error: Marginpars disabled}{}{You made
```

```
      your \string\textwidth\space (\the\textwidth) and
      \string\marginparwidth (\the\marginparwidth) too wide.\MessageBreak
      The allowed value for margin space: (\the\@tempdima). Needed value:
      (\the\@tempdimb).\MessageBreak
      This is not enough,
      so I will set \string\marginparwidth\space  to 0pt.\MessageBreak
      Let's hope that fixes it.
     }%
     \marginparwidth \z@
     \marginparsep \z@
  \fi
  \ifdim \@tempdima <2pc
     \@tempdimb=\paperwidth
     \advance\@tempdimb by -4pc
     \@settopoint\@tempdimb
     \GenericError{Pointsize}{Pointsize Error: Invalid sizes given}{}{You
     made your \string\textwidth\space (\the\textwidth)
     wider than the available total\MessageBreak
     (Which is: \the\@tempdimb). Please press X and try again.
     }%
  \fi
  \oddsidemargin \@tempdima
  \evensidemargin \@tempdima
```

These calculations are a lot easier. `\textheight` should have been set already. This does not check for the correct placement of the identification line!!

```
  \setlength\@tempdima{\paperheight}
  \addtolength\@tempdima{-\footskip}
  \addtolength\@tempdima{-\headheight}
  \addtolength\@tempdima{-\headsep}
  \setlength\@tempdimb{\@tempdima}
  \addtolength\@tempdima{-\textheight}
  \divide\@tempdima by 2
  \ifdim \@tempdima <2pc
  \advance\@tempdimb by -4pc
  \@settopoint\@tempdimb
     \GenericError{Pointsize}{Pointsize Error: Invalid sizes given}{}{You
     made your \string\textheight\space (\the\textheight)
     more than the available total.\MessageBreak
     (Which is: \the\@tempdimb). Please press X and try again.
     }%
  \fi
  \setlength\topmargin{\@tempdima}
  \setlength\id@boxheight{\@tempdima}
  \advance\id@boxheight by -2pc
}
```

```
\setlength\footnotesep{6.65\p@}
\setlength{\skip\footins}{9\p@ \@plus 4\p@ \@minus 2\p@}
```

### 1.4. Lists

List default values

```
\setlength\partopsep{2\p@ \@plus 1\p@ \@minus 1\p@}
\setlength{\leftmargini}{2em}
\setlength{\leftmarginii}{2.2em}
\setlength{\leftmarginiii}{1.87em}
\setlength{\leftmarginiv}{1.7em}
\setlength{\leftmarginv}{1em}
\setlength{\leftmarginvi}{1em}
\setlength{\labelsep}{.4em}
\setlength{\labelwidth}{\leftmargini}
\addtolength{\labelwidth}{-\labelsep}
```

Note that lists below level 3 do nothing else then readjusting the `\labelwidth`. This results in very small labels for the inner lists.

```
\def\@listI{%
  \leftmargin \leftmargini
  \topsep  9\p@ \@plus 3\p@ \@minus 5\p@
  \partopsep 3\p@ \@plus 1\p@ \@minus 2\p@
  \itemsep 4.5\p@ \@plus 2\p@ \@minus 1\p@
  \parsep 4.5\p@ \@plus 2\p@ \@minus 1\p@ }
\def\@listii{%
  \leftmargin \leftmarginii
  \labelwidth \leftmarginii
  \advance\labelwidth by -\labelsep
  \topsep 4.5\p@ \@plus 2\p@ \@minus 1\p@
  \parsep 2\p@ \@plus 1\p@ \@minus 1\p@
  \itemsep \parsep}
\def\@listiii{%
  \leftmargin \leftmarginiii
  \labelwidth \leftmarginiii
  \advance\labelwidth by -\labelsep
  \topsep 2\p@ \@plus 1\p@ \@minus 1\p@
  \parsep \z@
  \partopsep 1\p@ \@plus 0\p@ \@minus 1\p@
  \itemsep \topsep}
\def\@listiv{%
  \setlength{\leftmargin}{\leftmarginiv}%
  \setlength{\labelwidth}{\leftmarginiv}%
  \addtolength{\labelwidth}{-\labelsep}}
\def\@listv{%
```

```
  \setlength{\leftmargin}{\leftmarginv}%
  \setlength{\labelwidth}{\leftmarginv}%
  \addtolength{\labelwidth}{-\labelsep}}
\def\@listvi{%
  \setlength{\leftmargin}{\leftmarginvi}%
  \setlength{\labelwidth}{\leftmarginvi}%
  \addtolength{\labelwidth}{-\labelsep}}
\let\@listi\@listI
\@listi
```

### 1.5. FLOAT SEPARATION PARAMETERS

Separation on text pages.

```
\setlength\floatsep{12\p@ \@plus 2\p@ \@minus 2\p@}
\setlength\textfloatsep{20\p@ \@plus 2\p@ \@minus 4\p@}
\setlength\intextsep{12\p@ \@plus 2\p@ \@minus 2\p@}
\setlength\dblfloatsep{12\p@ \@plus 2\p@ \@minus 2\p@}
\setlength\dbltextfloatsep{20\p@ \@plus 2\p@ \@minus 4\p@}
```

Separation on float pages

```
\setlength\@fptop{0\p@ \@plus 1fil}
\setlength\@fpsep{8\p@ \@plus 2fil}
\setlength\@fpbot{0\p@ \@plus 1fil}
\setlength\@dblfptop{0\p@ \@plus 1fil}
\setlength\@dblfpsep{8\p@ \@plus 2fil}
\setlength\@dblfpbot{0\p@ \@plus 1fil}

\endinput
```

arXiv:astro-ph/0510138v2 20 Nov 2005

# klut12.clo

Kluwer Academic Publishers

1998/02/11

**Abstract.** This internal file takes care of list definitions and 'general' point size options. This is a tight version.

## Table of Contents

1 Implementation 2

1.1 Section size commands 2

1.2 Various values 3

1.3 Textheight and textwidth 3

1.4 Lists 5

1.5 Float separation parameters 6

© 2008 *Kluwer Academic Publishers. Printed in the Netherlands.*

# 1. Implementation

```
\ProvidesFile{klut12.clo}[\filedate ]
```

## 1.1. SECTION SIZE COMMANDS

added command: `\little`. This between `\scriptsize` and `\tiny`. Allowed type provided values: 6/7, 8/9, 9/10.5, 10/11.5, 11/12.5 12/13.5, 14/18, 17/22, 20/25, 25/30.

```
\renewcommand\normalsize{%
   \@setfontsize\normalsize\@xiipt{13.5}%
   \abovedisplayskip 11\p@ \@plus 2\p@ \@minus5\p@
   \abovedisplayshortskip 1\p@ \@plus 3\p@
   \belowdisplayshortskip 7\p@ \@plus 3\p@ \@minus3\p@
   \belowdisplayskip \abovedisplayskip
   \let\@listi\@listI}
\normalsize
\newcommand\small{%
   \@setfontsize\small\@xipt{12.5}%
   \abovedisplayskip 8.5\p@ \@plus3\p@ \@minus4\p@
   \abovedisplayshortskip \z@ \@plus2\p@
   \belowdisplayshortskip 4\p@ \@plus2\p@ \@minus2\p@
   \def\@listi{\leftmargin\leftmargini
               \topsep 4\p@ \@plus2\p@ \@minus2\p@
               \parsep 2\p@ \@plus\p@ \@minus\p@
               \itemsep \parsep}%
   \belowdisplayskip \abovedisplayskip
}
\newcommand\footnotesize{%
   \@setfontsize\footnotesize\@xpt{11.5}%
   \abovedisplayskip 6\p@ \@plus2\p@ \@minus4\p@
   \abovedisplayshortskip \z@ \@plus\p@
   \belowdisplayshortskip 3\p@ \@plus\p@ \@minus2\p@
   \def\@listi{\leftmargin\leftmargini
               \topsep 3\p@ \@plus\p@ \@minus\p@
               \parsep 2\p@ \@plus\p@ \@minus\p@
               \itemsep \parsep}%
   \belowdisplayskip \abovedisplayskip
}
\newcommand\scriptsize{\@setfontsize\scriptsize\@ixpt{10.5}}
\newcommand\little{\@setfontsize\little\@viiipt{9}}
\newcommand\tiny{\@setfontsize\tiny\@vipt\@viipt}
```

```
\newcommand\large{\@setfontsize\large\@xivpt{18}}
\newcommand\Large{\@setfontsize\Large\@xviipt{22}}
\newcommand\LARGE{\@setfontsize\LARGE\@xxpt{25}}
\newcommand\huge{\@setfontsize\huge\@xxvpt{30}}
\newcommand\Huge{\@setfontsize\Huge\@xxvpt{30}}
```

### 1.2. Various values

Note that `\hoffset` and `\voffset` are both compensated. This makes the calculations below easier.

```
\setlength\hoffset{-1in}
\setlength\voffset{-1in}
\setlength\parindent {14\p@}
\setlength\headheight{12\p@}
\setlength\headsep   {12\p@}
\setlength\topskip   {10\p@}
\setlength\footskip  {27.5\p@}
\setlength\marginparsep{10pt}
\setlength\marginparpush{5\p@}
\setlength\maxdepth  {.5\topskip}
\setlength\@maxdepth\maxdepth
\setlength\columnsep{12pt}
\setlength\columnseprule{0pt}
\setlength\fboxsep{3pt}
\setlength\fboxrule{.4pt}
```

### 1.3. Textheight and textwidth

These are the main reason for the existence of these files. For some stupid reason, LaTeX calculates textwidth out of `\paperwidth`. We did want to support letter paper, but our `\textwidth` is fixed, with the margins being calculated.

Presume `\textwidth` and `\marginparwidth` are set in the stylefile, or we're in trouble. The `2pc` value is used to compensate for the 'dead' corners in most laserprinters.

Calculations are done 'AtBeginDocument' to allow changes made in the preamble and later on in the stylefile.

```
\newdimen\id@boxheight
\AtBeginDocument{%
  \setlength\@tempdima{\paperwidth}%
  \addtolength\@tempdima{-\textwidth}%
```

```
\divide\@tempdima by 2
\setlength\@tempdimb\marginparwidth
\addtolength\@tempdimb\marginparsep
\addtolength\@tempdimb{2pc}%
\ifdim \@tempdima <\@tempdimb
   \@settopoint\@tempdimb
   \GenericError{Pointsize}{Pointsize Error: Marginpars disabled}{}{You made
    your \string\textwidth\space (\the\textwidth) and
    \string\marginparwidth (\the\marginparwidth) too wide.\MessageBreak
    The allowed value for margin space: (\the\@tempdima). Needed value:
    (\the\@tempdimb).\MessageBreak
    This is not enough,
    so I will set \string\marginparwidth\space  to 0pt.\MessageBreak
    Let's hope that fixes it.
   }%
   \marginparwidth \z@
   \marginparsep \z@
\fi
\ifdim \@tempdima <2pc
   \@tempdimb=\paperwidth
   \advance\@tempdimb by -4pc
   \@settopoint\@tempdimb
   \GenericError{Pointsize}{Pointsize Error: Invalid sizes given}{}{You
   made your \string\textwidth\space (\the\textwidth)
   wider than the available total\MessageBreak
   (Which is: \the\@tempdimb). Please press X and try again.
   }%
\fi
\oddsidemargin \@tempdima
\evensidemargin \@tempdima
```

These calculations are a lot easier. `\textheight` should have been set already. This does not check for the correct placement of the identification line!!

```
\setlength\@tempdima{\paperheight}
\addtolength\@tempdima{-\footskip}
\addtolength\@tempdima{-\headheight}
\addtolength\@tempdima{-\headsep}
\setlength\@tempdimb{\@tempdima}
\addtolength\@tempdima{-\textheight}
\divide\@tempdima by 2
\ifdim \@tempdima <2pc
\advance\@tempdimb by -4pc
\@settopoint\@tempdimb
```

```
     \GenericError{Pointsize}{Pointsize Error: Invalid sizes given}{}{You
     made your \string\textheight\space (\the\textheight)
     more than the available total.\MessageBreak
     (Which is: \the\@tempdimb). Please press X and try again.
     }%
  \fi
  \setlength\topmargin{\@tempdima}
  \setlength\id@boxheight{\@tempdima}
  \advance\id@boxheight by -2pc
}
```

```
\setlength\footnotesep{6.65\p@}
\setlength{\skip\footins}{12\p@ \@plus 4\p@ \@minus 2\p@}
```

## 1.4. Lists

List default values

```
\setlength\partopsep{2\p@ \@plus 1\p@ \@minus 1\p@}
\setlength{\leftmargini}{2em}
\setlength{\leftmarginii}{2.2em}
\setlength{\leftmarginiii}{1.87em}
\setlength{\leftmarginiv}{1.7em}
\setlength{\leftmarginv}{1em}
\setlength{\leftmarginvi}{1em}
\setlength{\labelsep}{.4em}
\setlength{\labelwidth}{\leftmargini}
\addtolength{\labelwidth}{-\labelsep}
```

Note that lists below level 3 do nothing else then readjusting the `\labelwidth`. This results in very small labels for the inner lists.

```
\def\@listI{%
  \leftmargin \leftmargini
  \topsep  11\p@ \@plus 3\p@ \@minus 5\p@
  \partopsep 4.5\p@ \@plus 1\p@ \@minus 2\p@
  \itemsep 6\p@ \@plus 2\p@ \@minus 1\p@
  \parsep 6\p@ \@plus 2\p@ \@minus 1\p@ }
\def\@listii{%
  \leftmargin \leftmarginii
  \labelwidth \leftmarginii
  \advance\labelwidth by -\labelsep
  \topsep 6\p@ \@plus 2\p@ \@minus 1\p@
  \parsep 3\p@ \@plus 1\p@ \@minus 1\p@
  \itemsep \parsep}
\def\@listiii{%
  \leftmargin \leftmarginiii
  \labelwidth \leftmarginiii
  \advance\labelwidth by -\labelsep
  \topsep 2\p@ \@plus 1\p@ \@minus 1\p@
  \parsep \z@
  \partopsep 1\p@ \@plus 0\p@ \@minus 1\p@
  \itemsep \topsep}
\def\@listiv{%
  \setlength{\leftmargin}{\leftmarginiv}%
  \setlength{\labelwidth}{\leftmarginiv}%
  \addtolength{\labelwidth}{-\labelsep}}
\def\@listv{%
  \setlength{\leftmargin}{\leftmarginv}%
  \setlength{\labelwidth}{\leftmarginv}%
  \addtolength{\labelwidth}{-\labelsep}}
\def\@listvi{%
  \setlength{\leftmargin}{\leftmarginvi}%
  \setlength{\labelwidth}{\leftmarginvi}%
  \addtolength{\labelwidth}{-\labelsep}}
\let\@listi\@listI
\@listi
```

## 1.5. Float separation parameters

Separation on text pages.

```
\setlength\floatsep{12\p@ \@plus 2\p@ \@minus 2\p@}
\setlength\textfloatsep{24\p@ \@plus 2\p@ \@minus 4\p@}
\setlength\intextsep{12\p@ \@plus 2\p@ \@minus 2\p@}
\setlength\dblfloatsep{12\p@ \@plus 2\p@ \@minus 2\p@}
\setlength\dbltextfloatsep{24\p@ \@plus 2\p@ \@minus 4\p@}
```

Separation on float pages

```
\setlength\@fptop{0\p@ \@plus 1fil}
\setlength\@fpsep{10\p@ \@plus 2fil}
\setlength\@fpbot{0\p@ \@plus 1fil}
\setlength\@dblfptop{0\p@ \@plus 1fil}
\setlength\@dblfpsep{10\p@ \@plus 2fil}
\setlength\@dblfpbot{0\p@ \@plus 1fil}

\endinput
```

arXiv:astro-ph/0510138v2 20 Nov 2005

# klu105.clo

Kluwer Academic Publishers

1998/02/11

**Abstract.** This internal file takes care of list definitions and ‘general’ point size options.

## Table of Contents

1 Implementation 2

- 1.1 Section size commands 2
- 1.2 Various values 3
- 1.3 Textheight and textwidth 3
- 1.4 Lists 5
- 1.5 Float separation parameters 6

© 2008 *Kluwer Academic Publishers. Printed in the Netherlands.*

# 1. Implementation

```
\ProvidesFile{klu105.clo}[\filedate ]
```

## 1.1. Section size commands

added command: `\little`. This between `\scriptsize` and `\tiny`. Allowed type provided values: 6/7, 7/8, 9/11, 10/11.5, 10.5/12, 11/13, 12/14, 14/18, 17/22, 20/25, 25/30.

```
\renewcommand\normalsize{%
   \@setfontsize\normalsize{10.5pt}{12}%
   \abovedisplayskip 10\p@ \@plus 2\p@ \@minus5\p@
   \abovedisplayshortskip \z@ \@plus 3\p@
   \belowdisplayshortskip 6\p@ \@plus 3\p@ \@minus3\p@
   \belowdisplayskip \abovedisplayskip
   \let\@listi\@listI}
\normalsize
\newcommand\small{%
   \@setfontsize\small\@xpt{11.5}%
   \abovedisplayskip 9\p@ \@plus3\p@ \@minus4\p@
   \abovedisplayshortskip \z@ \@plus2\p@
   \belowdisplayshortskip 5\p@ \@plus2\p@ \@minus2\p@
   \def\@listi{\leftmargin\leftmargini
               \topsep 4\p@ \@plus2\p@ \@minus2\p@
               \parsep 2\p@ \@plus\p@ \@minus\p@
               \itemsep \parsep}%
   \belowdisplayskip \abovedisplayskip
}
\newcommand\footnotesize{%
   \@setfontsize\footnotesize\@ixpt\@xipt
   \abovedisplayskip 6\p@ \@plus2\p@ \@minus4\p@
   \abovedisplayshortskip \z@ \@plus\p@
   \belowdisplayshortskip 3\p@ \@plus\p@ \@minus2\p@
   \def\@listi{\leftmargin\leftmargini
               \topsep 3\p@ \@plus\p@ \@minus\p@
               \parsep 2\p@ \@plus\p@ \@minus\p@
               \itemsep \parsep}%
   \belowdisplayskip \abovedisplayskip
}
\newcommand\scriptsize{\@setfontsize\scriptsize\@viiipt{9.5}}
\newcommand\little{\@setfontsize\little\@viipt\@viiipt}
\newcommand\tiny{\@setfontsize\tiny\@vipt\@viipt}
\newcommand\large{\@setfontsize\large\@xiipt{14}}
\newcommand\Large{\@setfontsize\Large\@xivpt{18}}
\newcommand\LARGE{\@setfontsize\LARGE\@xviipt{22}}
\newcommand\huge{\@setfontsize\huge\@xxpt{25}}
```

```
\newcommand\Huge{\@setfontsize\Huge\@xxvpt{30}}
```

### 1.2. Various values

Note that `\hoffset` and `\voffset` are both compensated. This makes the calculations below easier.

```
\setlength\hoffset{-1in}
\setlength\voffset{-1in}
\setlength\parindent {14\p@}
\setlength\headheight{12\p@}
\setlength\headsep   {13\p@}
\setlength\topskip   {10\p@}
\setlength\footskip  {27.5\p@}
\setlength\marginparsep{10pt}
\setlength\marginparpush{5\p@}
\setlength\maxdepth  {.5\topskip}
\setlength\@maxdepth\maxdepth
\setlength\columnsep{10pt}
\setlength\columnseprule{0pt}
\setlength\fboxsep{3pt}
\setlength\fboxrule{.4pt}
```

### 1.3. Textheight and textwidth

These are the main reason for the existence of these files. For some stupid reason, LaTeX calculates textwidth out of `\paperwidth`. We did want to support letter paper, but our `\textwidth` is fixed, with the margins being calculated.

Presume `\textwidth` and `\marginparwidth` are set in the stylefile, or we're in trouble. The `2pc` value is used to compensate for the 'dead' corners in most laserprinters.

Calculations are done 'AtBeginDocument' to allow changes made in the preamble and later on in the stylefile.

```
\newdimen\id@boxheight
\AtBeginDocument{%
  \setlength\@tempdima{\paperwidth}%
  \addtolength\@tempdima{-\textwidth}%
  \divide\@tempdima by 2
  \setlength\@tempdimb\marginparwidth
  \addtolength\@tempdimb\marginparsep
  \addtolength\@tempdimb{2pc}%
  \ifdim \@tempdima <\@tempdimb
    \@settopoint\@tempdimb
    \GenericError{Pointsize}{Pointsize Error: Marginpars disabled}{}{You made
```

```
      your \string\textwidth\space (\the\textwidth) and
      \string\marginparwidth (\the\marginparwidth) too wide.\MessageBreak
      The allowed value for margin space: (\the\@tempdima). Needed value:
      (\the\@tempdimb).\MessageBreak
      This is not enough,
      so I will set \string\marginparwidth\space  to 0pt.\MessageBreak
      Let's hope that fixes it.
     }%
     \marginparwidth \z@
     \marginparsep \z@
  \fi
  \ifdim \@tempdima <2pc
     \@tempdimb=\paperwidth
     \advance\@tempdimb by -4pc
     \@settopoint\@tempdimb
     \GenericError{Pointsize}{Pointsize Error: Invalid sizes given}{}{You
     made your \string\textwidth\space (\the\textwidth)
     wider than the available total\MessageBreak
     (Which is: \the\@tempdimb). Please press X and try again.
     }%
  \fi
  \oddsidemargin \@tempdima
  \evensidemargin \@tempdima
```

These calculations are a lot easier. `\textheight` should have been set already. This does not check for the correct placement of the identification line!!

```
  \setlength\@tempdima{\paperheight}
  \addtolength\@tempdima{-\footskip}
  \addtolength\@tempdima{-\headheight}
  \addtolength\@tempdima{-\headsep}
  \setlength\@tempdimb{\@tempdima}
  \addtolength\@tempdima{-\textheight}
  \divide\@tempdima by 2
  \ifdim \@tempdima <2pc
  \advance\@tempdimb by -4pc
  \@settopoint\@tempdimb
     \GenericError{Pointsize}{Pointsize Error: Invalid sizes given}{}{You
     made your \string\textheight\space (\the\textheight)
     more than the available total.\MessageBreak
     (Which is: \the\@tempdimb). Please press X and try again.
     }%
  \fi
  \setlength\topmargin{\@tempdima}
  \setlength\id@boxheight{\@tempdima}
  \advance\id@boxheight by -2pc
}
```

```
\setlength\footnotesep{6.65\p@}
\setlength{\skip\footins}{9\p@ \@plus 4\p@ \@minus 2\p@}
```

## 1.4. Lists

List default values

```
\setlength\partopsep{2\p@ \@plus 1\p@ \@minus 1\p@}
\setlength{\leftmargini}{2em}
\setlength{\leftmarginii}{2.2em}
\setlength{\leftmarginiii}{1.87em}
\setlength{\leftmarginiv}{1.7em}
\setlength{\leftmarginv}{1em}
\setlength{\leftmarginvi}{1em}
\setlength{\labelsep}{.4em}
\setlength{\labelwidth}{\leftmargini}
\addtolength{\labelwidth}{-\labelsep}
```

Note that lists below level 3 do nothing else then readjusting the `\labelwidth`. This results in very small labels for the inner lists.

```
\def\@listI{%
  \leftmargin \leftmargini
  \topsep  9\p@ \@plus 3\p@ \@minus 5\p@
  \partopsep 3\p@ \@plus 1\p@ \@minus 2\p@
  \itemsep 4.5\p@ \@plus 2\p@ \@minus 1\p@
  \parsep 4.5\p@ \@plus 2\p@ \@minus 1\p@ }
\def\@listii{%
  \leftmargin \leftmarginii
  \labelwidth \leftmarginii
  \advance\labelwidth by -\labelsep
  \topsep 4.5\p@ \@plus 2\p@ \@minus 1\p@
  \parsep 2\p@ \@plus 1\p@ \@minus 1\p@
  \itemsep \parsep}
\def\@listiii{%
  \leftmargin \leftmarginiii
  \labelwidth \leftmarginiii
  \advance\labelwidth by -\labelsep
  \topsep 2\p@ \@plus 1\p@ \@minus 1\p@
  \parsep \z@
  \partopsep 1\p@ \@plus 0\p@ \@minus 1\p@
  \itemsep \topsep}
\def\@listiv{%
  \setlength{\leftmargin}{\leftmarginiv}%
  \setlength{\labelwidth}{\leftmarginiv}%
  \addtolength{\labelwidth}{-\labelsep}}
\def\@listv{%
```

```
  \setlength{\leftmargin}{\leftmarginv}%
  \setlength{\labelwidth}{\leftmarginv}%
  \addtolength{\labelwidth}{-\labelsep}}
\def\@listvi{%
  \setlength{\leftmargin}{\leftmarginvi}%
  \setlength{\labelwidth}{\leftmarginvi}%
  \addtolength{\labelwidth}{-\labelsep}}
\let\@listi\@listI
\@listi
```

### 1.5. FLOAT SEPARATION PARAMETERS

Separation on text pages.

```
\setlength\floatsep{12\p@ \@plus 2\p@ \@minus 2\p@}
\setlength\textfloatsep{20\p@ \@plus 2\p@ \@minus 4\p@}
\setlength\intextsep{12\p@ \@plus 2\p@ \@minus 2\p@}
\setlength\dblfloatsep{12\p@ \@plus 2\p@ \@minus 2\p@}
\setlength\dbltextfloatsep{20\p@ \@plus 2\p@ \@minus 4\p@}
```

Separation on float pages

```
\setlength\@fptop{0\p@ \@plus 1fil}
\setlength\@fpsep{8\p@ \@plus 2fil}
\setlength\@fpbot{0\p@ \@plus 1fil}
\setlength\@dblfptop{0\p@ \@plus 1fil}
\setlength\@dblfpsep{8\p@ \@plus 2fil}
\setlength\@dblfpbot{0\p@ \@plus 1fil}

\endinput
```